

29/26 GAUGE COLOR CHART


Construction Metal Products inc.

CMP manufactures a variety of metal roof and wall panels in 26 gauge and/or 29 gauge material. Please see the back of this chart to view the profiles that are available.

CMP's 40-year Silicon Polyester paint system, with Cool Roof Technology, provides solar reflectance ratings to meet today's Energy Star requirements. The 40-year paint system and galvalume steel guarantees a winning combination of weather-tested paint performance and superior corrosion resistance.




Colors shown here are as accurate as the printing process permits. Slight variations should be expected for the actual coil product.

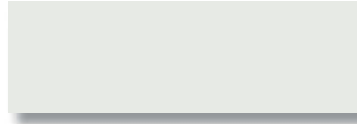

Polar White (Blanco Polar)




Charcoal Grey (Griz Oscuro)

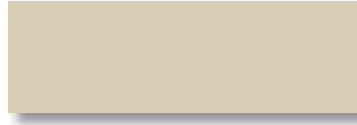


Light Stone (Piedra Clara)




Burnished Slate (Griz Carbón)

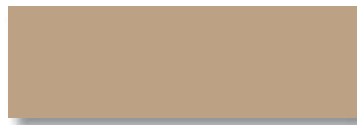

Sahara Tan (Arena)

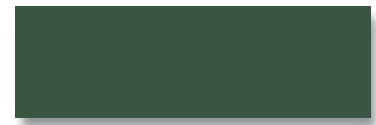

Forest Green (Verde Selva)

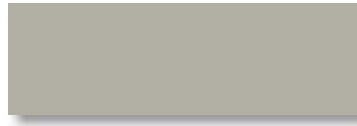

Ash Grey (Griz Ceniza)




Gallery Blue (Azul Royal)




Hawaiian Blue (Azul Cielo)



Cocoa Brown (Coco)

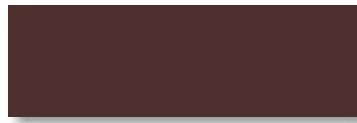

Burgundy (Vino)

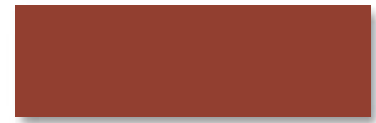

Country Red (Terracota)



Brite Red (Rojo Sangre)



Copper Penny (Cobre Metálico)



Coal Black (Onyx Negro)




Galvalume (Galvalume)

CMP MULTI-RIB

CMP MULTI-RIB Design Is Unmatched In Performance Durability.


(29 GA and 26 GA)

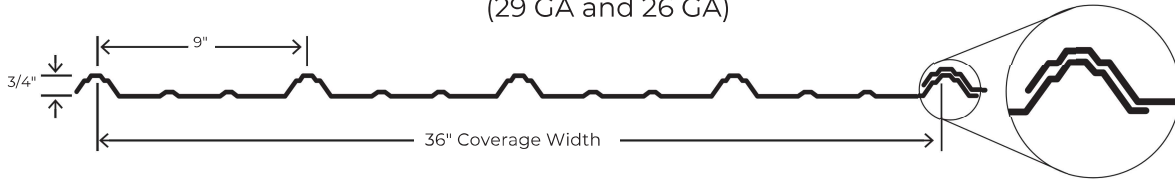

CMP R-PANEL

A Superior Roof or Wall Panel with Maximum Strength.


(26 GA)

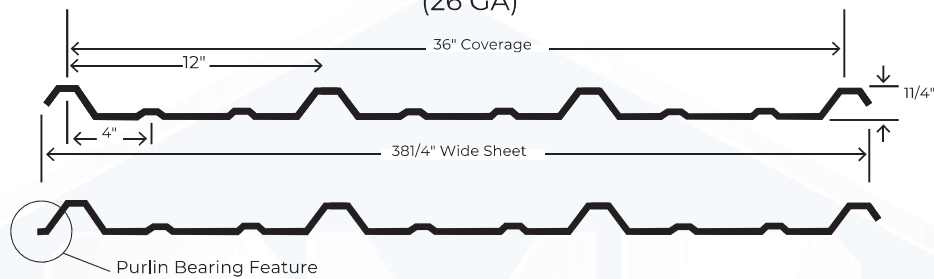

CMP 5-V

The 5-V's Stunning Design Makes it Very Popular with Residential and Commercial Customers.


(26 GA and 24 GA)

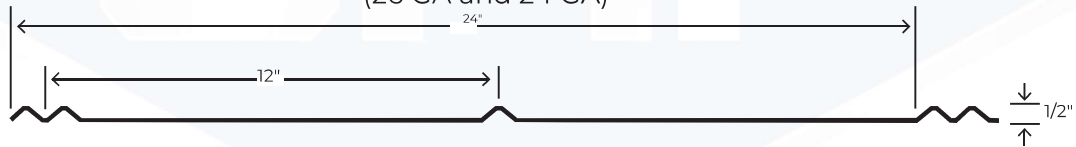

CMP NAIL STRIP

Revolutionary Design Eliminates the need for Through Fasteners.

(26 GA and 24 GA)

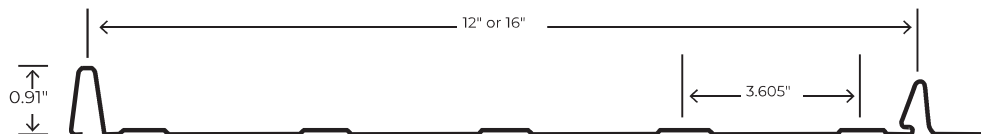

SAFETY PRECAUTIONS

Gloves should be worn to prevent injury while handling steel panels. Safety glasses should be worn to prevent eye injury when cutting or drilling steel panels with power tools. Use care when walking, sitting, or kneeling on a steel roof to avoid a fall. Steel panels may become slippery when wet. Do not work on the steel panels when wet or when climatic conditions are not suitable for safe installation. Failure to comply with these procedures relieves the manufacturer of responsibility for any resultant damage to or deterioration of the product and VOIDS ALL WARRANTIES. THERE IS NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PURPOSE.